

## DDJ-SZ

**DJ Controller**  
**Contrôleur pour DJ**  
**DJ Controller**  
**DJ Controller**  
**Controlador DJ**  
**Controlador para DJ**  
**DJ Контроллер**

<http://pioneerdj.com/support/>  
<http://serato.com/>

The Pioneer DJ support site shown above offers FAQs, information on software and various other types of information and services to allow you to use your product in greater comfort.

For the latest version of the Serato DJ software, access Serato.com and download the software from there.

Le site de support DJ de Pioneer indiqué ci-dessus propose une FAQ, des informations sur le logiciel et divers types d'informations et de services qui permettent une utilisation plus confortable de ce produit.

Pour la toute dernière version du logiciel Serato DJ, accédez à Serato.com et téléchargez le logiciel de ce site.

Die oben gezeigte Pioneer DJ-Support-Website enthält häufig gestellte Fragen, Informationen über Software und andere wichtige Informationen und Dienste, die Ihnen helfen, Ihr Produkt optimal zu verwenden.

Für die neueste Version der Serato DJ-Software gehen Sie zu Serato.com und laden die Software von dort herunter.

Il sito di supporto DJ Pioneer indicato qui sopra offre una sezione FAQ, informazioni sul software ed informazioni e servizi di vario tipo, per permettere un uso più confortevole dei nostri prodotti.

Per ottenere la più recente versione di Serato DJ, raggiungere Serato.com e scaricare il software di lì.

De bovengenoemde Pioneer DJ ondersteuningswebsite biedt een overzicht van de vaak gestelde vragen, informatie over software en allerlei andere soorten informatie en diensten die u in staat stellen dit product met meer gemak te gebruiken.

Ga voor de nieuwste versie van de Serato DJ-software naar Serato.com en download de software van deze site.

El sitio de asistencia Pioneer DJ mostrado arriba ofrece las preguntas frecuentes, información del software y varios otros tipos de información y servicios que le permitirán usar su producto con mayor confort.

Para la versión más reciente del software Serato DJ, acceda a Serato.com y descargue el software desde allí.

O site de suporte da Pioneer DJ mostrado acima oferece FAQs, informações sobre o software e outros tipos de informações e serviços para permitir utilizar o produto com um maior conforto.

Para obter a versão mais recente do software Serato DJ, acesse a Serato.com e transfira o software a partir daí.

На указанном выше сайте поддержки Pioneer DJ содержатся раздел часто задаваемых вопросов, информация по программному обеспечению, а также различные другие типы информации и услуг, позволяющие использовать ваше изделие более лучшим образом.  
Относительно самой последней версии программного обеспечения Serato DJ зайдите на Serato.com и загрузите оттуда программное обеспечение.

**serato** || **serato**  **DJ**

Operating Instructions (Basic Edition)

Mode d'emploi (Édition de base)

Bedienungsanleitung (Grundlegende Edition)

Istruzioni per l'uso (edizione base)

Handleiding (basiseditie)

Manual de instrucciones (Edición básica)

Manual de instruções (edição básica)

Инструкции по эксплуатации (Основное издание)

## CAUTION

TO PREVENT THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

D3-4-2-1-1\_B1\_En

## WARNING

This equipment is not waterproof. To prevent a fire or shock hazard, do not place any container filled with liquid near this equipment (such as a vase or flower pot) or expose it to dripping, splashing, rain or moisture.

D3-4-2-1-3\_A1\_En

## WARNING

This product equipped with a three-wire grounding (earthed) plug - a plug that has a third (grounding) pin. This plug only fits a grounding-type power outlet. If you are unable to insert the plug into an outlet, contact a licensed electrician to replace the outlet with a properly grounded one. Do not defeat the safety purpose of the grounding plug.

D3-4-2-1-6\_A1\_En

## WARNING

To prevent a fire hazard, do not place any naked flame sources (such as a lighted candle) on the equipment.

D3-4-2-1-7a\_A1\_En

## Operating Environment

Operating environment temperature and humidity: +5 °C to +35 °C (+41 °F to +95 °F); less than 85 %RH (cooling vents not blocked)

Do not install this unit in a poorly ventilated area, or in locations exposed to high humidity or direct sunlight (or strong artificial light).

D3-4-2-1-7c\*\_A2\_En

## VENTILATION CAUTION

When installing this unit, make sure to leave space around the unit for ventilation to improve heat radiation (at least 5 cm at top, 5 cm at rear, and 5 cm at each side).

D3-4-2-1-7d\*\_A1\_En

## For Europe



If you want to dispose this product, do not mix it with general household waste. There is a separate collection system for used electronic products in accordance with legislation that requires proper treatment, recovery and recycling.

Private households in the member states of the EU, in Switzerland and Norway may return their used electronic products free of charge to designated collection facilities or to a retailer (if you purchase a similar new one).

For countries not mentioned above, please contact your local authorities for the correct method of disposal.

By doing so you will ensure that your disposed product undergoes the necessary treatment, recovery and recycling and thus prevent potential negative effects on the environment and human health.

K058b\_A1\_En

### For Finland customers

Laite on liitettävä suojamaadoituskoskettimilla varustettuun pistorasiaan

### For Norway customers


Apparatet må tilkoples jordet stikkontakt

### For Sweden customers

Apparaten skall anslutas till jordat uttag

D3-4-2-1-6b\_A1\_En

## CAUTION

The  switch on this unit will not completely shut off all power from the AC outlet. Since the power cord serves as the main disconnect device for the unit, you will need to unplug it from the AC outlet to shut down all power. Therefore, make sure the unit has been installed so that the power cord can be easily unplugged from the AC outlet in case of an accident. To avoid fire hazard, the power cord should also be unplugged from the AC outlet when left unused for a long period of time (for example, when on vacation).

D3-4-2-2a\*\_A1\_En

## WARNING

Store small parts out of the reach of children and infants. If accidentally swallowed, contact a doctor immediately.

D41-6-4\_A1\_En

## POWER-CORD CAUTION

Handle the power cord by the plug. Do not pull out the plug by tugging the cord and never touch the power cord when your hands are wet as this could cause a short circuit or electric shock. Do not place the unit, a piece of furniture, etc., on the power cord, or pinch the cord. Never make a knot in the cord or tie it with other cords. The power cords should be routed such that they are not likely to be stepped on. A damaged power cord can cause a fire or give you an electrical shock. Check the power cord once in a while. When you find it damaged, ask your nearest PIONEER authorized service center or your dealer for a replacement.

S002\*\_A1\_En

## For other areas

### FEDERAL COMMUNICATIONS COMMISSION DECLARATION OF CONFORMITY

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Product Name: DJ Controller

Model Number: DDJ-SZ

Responsible Party Name: PIONEER ELECTRONICS (USA) INC.  
SERVICE SUPPORT DIVISION

Address: 1925 E. DOMINGUEZ ST. LONG BEACH, CA 90810-1003, U.S.A.

Phone: 1-800-421-1404

URL: <http://www.pioneerelectronics.com>

D8-10-4\* \_C1\_En

### NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

D8-10-1-2\_A1\_En

### CAUTION

This product satisfies FCC regulations when shielded cables and connectors are used to connect the unit to other equipment. To prevent electromagnetic interference with electric appliances such as radios and televisions, use shielded cables and connectors for connections.

D8-10-3a\_A1\_En

### Information to User

Alterations or modifications carried out without appropriate authorization may invalidate the user's right to operate the equipment.

D8-10-2\_A1\_En

---

---

# Contents

## How to read this manual

- Thank you for buying this Pioneer product.  
Be sure to read this booklet and the "Operating Instructions" provided on the Pioneer DJ support site. Both include important information that should be fully understood before using this product. After you have finished reading the instructions, put them away in a safe place for future reference.  
For instructions on obtaining the Serato DJ software's manual, see *Acquiring the manual* (p.5).
- In this manual, names of screens and menus displayed on the product and on the computer screen, as well as names of buttons and terminals, etc., are indicated within brackets. (e.g.: [CUE] button, [Files] panel, [MIC1] terminal)
- Please note that the screens and specifications of the software described in this manual as well as the external appearance and specifications of the hardware are currently under development and may differ from the final specifications.
- Please note that depending on the operating system version, web browser settings, etc., operation may differ from the procedures described in this manual.

This manual consists mainly of explanations of functions of this unit as hardware. For detailed instructions on operating the Serato DJ software, see the Serato DJ software manual.

- The Serato DJ software manual can be downloaded from "Serato.com". For details, see *Downloading the Serato DJ software manual* (p. 5).
- The most recent version of the Operating Instructions can be downloaded from the Pioneer DJ support site. For details, see *Downloading this unit's operating instructions* (p.5).

<b>01 Before start</b>	
What's in the box .....	5
Acquiring the manual .....	5
Installing the software .....	5
Names of Parts .....	8
<b>02 Operation</b>	
Connections .....	11
Starting the system .....	12
Quitting the system .....	14
<b>03 Additional information</b>	
Changing the settings .....	15
Troubleshooting .....	15
About trademarks and registered trademarks .....	15
Cautions on copyrights .....	15
Specifications .....	15

# Before start

## What's in the box

- CD-ROM (Installation Disc)
- Power cord
- USB cable<sup>[1]</sup>
- Warranty card
- Operating Instructions (Basic Edition)

[1] Only one USB cable is included with this unit.

To connect two units, use a cable conforming to USB 2.0 standards.

## Acquiring the manual

The operating instructions may be in a file in PDF format. Adobe® Reader® must be installed to read files in PDF format. If you do not have Adobe Reader, please install it from the download link on the CD-ROM's menu screen.

## Downloading this unit's operating instructions

### 1 Insert the CD-ROM into the computer's optical drive.

The CD-ROM menu is displayed.

If the CD-ROM's menu does not appear when the CD-ROM is inserted, perform the operations below.

- For Windows  
Open the optical drive from **[Computer (or My Computer)]** in the **[Start]** menu, then double-click the **[CD\_menu.exe]** icon.
- For Mac OS X  
In Finder, double-click the **[CD\_menu.app]** icon directly.

### 2 When the CD-ROM's menu is displayed, select **[DDJ-SZ: Download the Operating Instructions (PDF file)]**, then click **[Start]**.

### 3 "An internet environment is required to access the site. Connected to the internet?" is displayed. Click **[Yes]**.

The web browser is launched and the Pioneer DJ support site is displayed.

### 4 On the Pioneer DJ support site, click "Manuals" under "DDJ-SZ".

### 5 Click on the required language on the download page.

Downloading of the operating instructions begins.

## Downloading the Serato DJ software manual

### 1 Insert the CD-ROM into the computer's optical drive.

The CD-ROM menu is displayed.

If the CD-ROM's menu does not appear when the CD-ROM is inserted, perform the operations below.

- For Windows  
Open the optical drive from **[Computer (or My Computer)]** in the **[Start]** menu, then double-click the **[CD\_menu.exe]** icon.
- For Mac OS X  
In Finder, double-click the **[CD\_menu.app]** icon directly.

### 2 When the CD-ROM's menu is displayed, select **[Serato DJ: Download the Software Manual (PDF file)]**, then click **[Start]**.

### 3 "An internet environment is required to access the site. Connected to the internet?" is displayed. Click **[Yes]**.

The web browser is launched and the Pioneer DJ support site is displayed.

- To close the CD-ROM menu, click **[Exit]**.

### 4 Click **[Software Info]** under **[DDJ-SZ]** on the Pioneer DJ support site.

### 5 Click the link to the Serato DJ download page.

The Serato DJ download page is displayed.

### 6 Log in to your "Serato.com" user account.

Input the e-mail address and password you have registered to log in to "Serato.com".

### 7 From "More Downloads" on the right side of the download page, click "Serato DJ x.x Manual".

Downloading of the Serato DJ software manual starts.

## Installing the software

### Before installing the software

For the latest version of the Serato DJ software, access Serato.com and download the software from there. A software download link is also provided on the included CD-ROM.

- For details, refer to *Installation procedure (Windows)* or *Installation procedure (Mac OS X)*.
- The user is responsible for preparing the computer, network devices and other elements of the Internet usage environment required for a connection to the Internet.

### About the driver software

This driver software is an exclusive driver for outputting audio signals from a computer.

### Checking the latest information on the driver software

For detailed information on this unit's designated driver software, see the Pioneer DJ support site below.

<http://pioneerdj.com/support/>

## About the Serato DJ software

Serato DJ is a DJ software application by Serato. DJ performances are possible by connecting the computer on which this software is installed to this unit.

### Minimum operating environment

Supported operating systems		CPU and required memory
Mac OS X: 10.9, 10.8, 10.7 and 10.6	32-bit version	Intel® processor, Core™ i3, i5 and i7 1.07 GHz or better, Intel® processor, Core™ 2 Duo 2.0 GHz or better 2 GB or more of RAM
	64-bit version	Intel® processor, Core™ i3, i5 and i7 1.07 GHz or better, Intel® processor, Core™ 2 Duo 2.4 GHz or better 4 GB or more of RAM
Windows: Windows 7	32-bit version	Intel® processor, Core™ i3, i5 and i7 1.07 GHz or better, Intel® processor, Core™ 2 Duo 2.0 GHz or better 2 GB or more of RAM
	64-bit version	Intel® processor, Core™ i3, i5 and i7 1.07 GHz or better, Intel® processor, Core™ 2 Duo 2.4 GHz or better 4 GB or more of RAM
Others		
Optical drive	Optical disc drive on which the CD-ROM can be read	
USB port	A USB 2.0 port is required to connect the computer with this unit.	
Display resolution	Resolution of 1 280 x 720 or greater	
Internet connection	An Internet connection is required for registering the "Serato.com" user account and downloading the software.	

- For the latest information on the required operating environment and compatibility as well as to acquire the latest operating system, refer to "Software Info" under "DDJ-SZ" on the Pioneer DJ support site below.  
<http://pioneerdj.com/support/>
- Operating System support assumes you are using the latest point release for that version.
- Operation is not guaranteed on all computers, even if all the required operating environment conditions indicated here are fulfilled.
- Depending on the computer's power-saving settings, etc., the CPU and hard disk may not provide sufficient processing capabilities. For notebook computers in particular, make sure the computer is in the proper conditions to provide constant high performance (for example by keeping the AC power connected) when using Serato DJ.
- Use of the Internet requires a separate contract with a provider offering Internet services and payment of provider fees.

## Installation procedure (Windows)

Do not connect this unit and the computer until installation is completed.

- Log on as the user which was set as the computer's administrator before installing.
- If any other programs are running on the computer, quit them.

### 1 Insert the CD-ROM into the computer's optical drive.

The CD-ROM menu is displayed.

- If the CD-ROM menu does not appear when the CD-ROM is inserted, open the optical drive from [Computer (or My Computer)] in the [Start] menu, then double-click the [CD\_menu.exe] icon.

### 2 From the menu that appears, select [Install Driver Software], then click [Start].

### 3 "Download the latest version? An internet environment is required to access the site." is displayed. Click [Yes].

The web browser is launched and the Pioneer DJ support site is displayed.

### 4 Click [Software Download] under [DDJ-SZ] on the Pioneer DJ support site.

### 5 Click [Driver Software].

### 6 From the download page, download the driver software for Windows (DDJ-SZ\_X.XXX.exe).

### 7 Double-click the downloaded file.

The driver installation screen appears.

### 8 Carefully read the *Software end user license agreement* and if you consent to the provisions, put a check mark in [I agree.] and click [OK].

If you do not consent to the provisions of the *Software end user license agreement*, click [Cancel] and stop installation.

### 9 Proceed with installation according to the instructions on the screen.

If [Windows Security] appears on the screen while the installation is in progress, click [Install this driver software anyway] and continue with the installation.

When the installation program is completed, a completion message appears.

After installing the driver software, install the Serato DJ software.

### 10 Select [Download Serato DJ Software.] from the CD-ROM's menu, then click [Start].

### 11 "An internet environment is required to access the site. Connected to the internet?" is displayed. Click [Yes].

The web browser is launched and the Pioneer DJ support site is displayed.

### 12 Click [Software Info] under [DDJ-SZ] on the Pioneer DJ support site.

### 13 Click the link to the Serato DJ download page.

The Serato DJ download page is displayed.

### 14 Log in to your "Serato.com" user account.

- If you have already registered a user account on "Serato.com", proceed to step 16.
- If you have not completed registering your user account, do so following the procedure below.
  - Following the instructions on the screen, input your e-mail address and the password you want to set, then select the region in which you live.
  - If you check [E-mail me Serato newsletters], newsletters providing the latest information on Serato products will be sent from Serato.
  - Once user account registration is completed, you will receive an e-mail at the e-mail address you have input. Check the contents of the e-mail sent from "Serato.com".
- Be careful not to forget the e-mail address and password specified when you performed user registration. They will be required for updating the software.
- The personal information input when registering a new user account may be collected, processed and used based on the privacy policy on the Serato website.

### 15 Click the link in the e-mail message sent from "Serato.com".

This takes you to the Serato DJ download page. Proceed to step 17.


### 16 Log in.

Input the e-mail address and password you have registered to log in to "Serato.com".

### 17 Download the Serato DJ software from the download page.

Unzip the downloaded file, then double-click the unzipped file to launch the installer.

**18 Read the terms of the license agreement carefully, and if you agree, select [I agree to the license terms and conditions], then click [Install].**

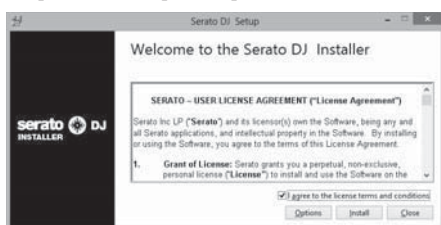

- If you do not agree to the contents of the license agreement, click [Close] to cancel installation.

Installation begins.



The message of successful installation appears once installation is completed.

**19 Click [Close] to quit the Serato DJ installer.**



## Installation procedure (Mac OS X)

Do not connect this unit and the computer until installation is completed.

- If any other programs are running on the computer, quit them.

**1 Insert the CD-ROM into the computer's optical drive.**

The CD-ROM menu is displayed.

- If the CD-ROM menu does not appear on the screen when the CD-ROM is inserted, open the optical driver from Finder, then double-click the [CD\_menu.app] icon.

**2 From the menu that appears, select [Install Driver Software], then click [Start].**

**3 "Download the latest version? An internet environment is required to access the site." is displayed. Click [Yes].**

The web browser is launched and the Pioneer DJ support site is displayed.

**4 Click [Software Download] under [DDJ-SZ] on the Pioneer DJ support site.**

**5 Click [Driver Software].**

**6 From the download page, download the driver software for Mac OS (DDJ-SZ\_M\_X.X.X.dmg).**

**7 Double-click the downloaded file.**

The [DDJ-SZ\_AudioDriver] menu screen appears.

**8 Double-click [DDJ-SZ\_AudioDriver.pkg].**

The driver installation screen appears.

**9 Check the details on the screen and click [Continue].**

**10 When the end user license agreement appears, read *Software end user license agreement* carefully, then click [Continue].**

**11 If you consent to the provisions of the *Software end user license agreement*, click [Agree].**

If you do not consent to the provisions of the *Software end user license agreement*, click [Disagree] and stop installation.

**12 Proceed with installation according to the instructions on the screen.**

**13 Select [Download Serato DJ Software.] from the CD-ROM's menu, then click [Start].**

**14 "An internet environment is required to access the site. Connected to the internet?" is displayed. Click [Yes].**

The web browser is launched and the Pioneer DJ support site is displayed.

**15 Click [Software Info] under [DDJ-SZ] on the Pioneer DJ support site.**

**16 Click the link to the Serato DJ download page.**

The Serato DJ download page is displayed.

**17 Log in to your "Serato.com" user account.**

- If you have already registered a user account on "Serato.com", proceed to step 19.
- If you have not completed registering your user account, do so following the procedure below.
  - Following the instructions on the screen, input your e-mail address and the password you want to set, then select the region in which you live.
  - If you check [E-mail me Serato newsletters], newsletters providing the latest information on Serato products will be sent from Serato.
  - Once user account registration is completed, you will receive an e-mail at the e-mail address you have input. Check the contents of the e-mail sent from "Serato.com".
- Be careful not to forget the e-mail address and password specified when you performed user registration. They will be required for updating the software.
- The personal information input when registering a new user account may be collected, processed and used based on the privacy policy on the Serato website.

**18 Click the link in the e-mail message sent from "Serato.com".**

This takes you to the Serato DJ download page. Proceed to step 20.

**19 Log in.**


Input the e-mail address and password you have registered to log in to "Serato.com".

**20 Download the Serato DJ software from the download page.**

Unzip the downloaded file, then double-click the unzipped file to launch the installer.



21 Read the terms of the license agreement carefully, and if you agree, click [Agree].

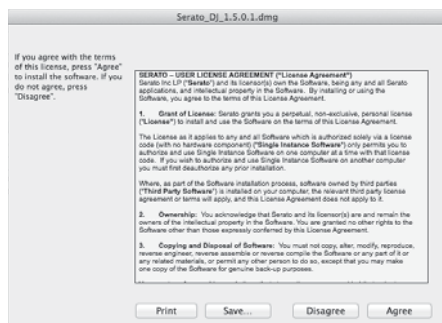


- If you do not agree to the contents of the usage agreement, click [Disagree] to cancel installation.

22 If the following screen appears, drag and drop the [Serato DJ] icon on the [Applications] folder icon.




## Names of Parts

- For details on the functions of the various buttons and controls, see *Part names and functions* in the Operating Instructions.

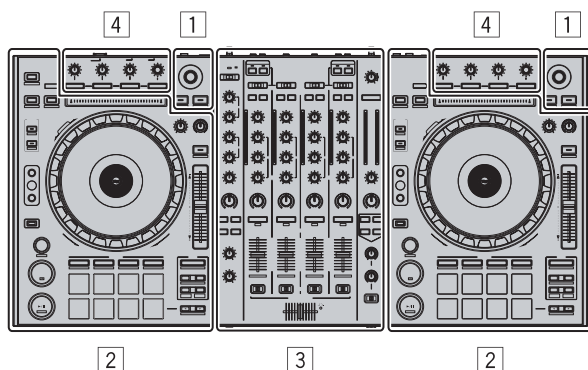

- 1 Browser section
- 2 Deck section
- 3 Mixer section
- 4 Effect section


## Browser section



- 1 Rotary selector
- 2 BACK (VIEW) button
- 3 LOAD PREPARE (AREA) button

## Deck section

This section is used to control the four decks. The buttons and controls for operating decks 1 and 3 are located on the left side of the controller, those for operating decks 2 and 4 are located on the right side of the controller.

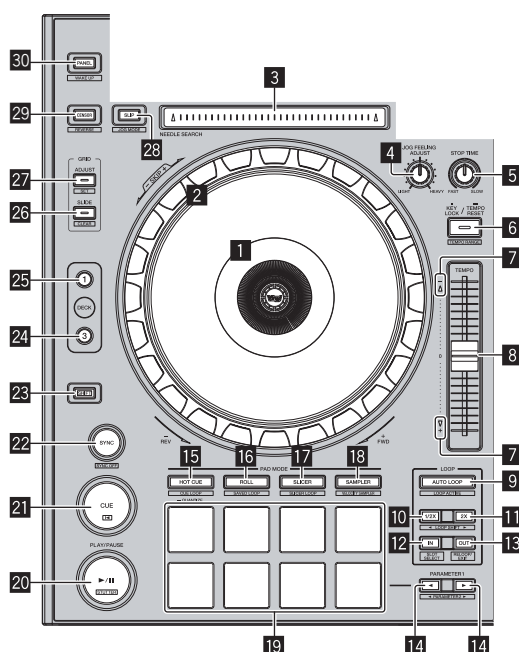


- 1 Jog dial display section
- 2 Jog dial
- 3 NEEDLE SEARCH pad
- 4 JOG FEELING ADJUST control
- 5 STOP TIME control
- 6 KEY LOCK button
- 7 Takeover indicator
- 8 TEMPO slider
- 9 AUTO LOOP button
- 10 LOOP 1/2X button
- 11 LOOP 2X button



- 12 LOOP IN button
- 13 LOOP OUT button
- 14 PARAMETER◀ button, PARAMETER▶ button
- 15 HOT CUE mode button
- 16 ROLL mode button
- 17 SLICER mode button
- 18 SAMPLER mode button
- 19 Performance pads
- 20 PLAY/PAUSE ►/II button
- 21 CUE button
- 22 SYNC button
- 23 SHIFT button
- 24 DECK 3 button
- 25 DECK 1 button
- 26 GRID SLIDE button
- 27 GRID ADJUST button
- 28 SLIP button
- 29 CENSOR button
- 30 PANEL button

- 6 MASTER CUE button
- 7 Master level indicator
- 8 BOOTH MONITOR control
- 9 MASTER OUT COLOR control
- 10 OSCILLATOR SELECT button
- 11 OSCILLATOR VOLUME control
- 12 OSCILLATOR PARAMETER control
- 13 OSC ASSIGN selector switch
- 14 HEADPHONES LEVEL control
- 15 HEADPHONES MIXING control
- 16 SOUND COLOR FX buttons
- 17 SAMPLER, MIC COLOR control
- 18 SAMPLER VOL control
- 19 EQ (HI, LOW) controls
- 20 MIC2 control
- 21 MIC1 control
- 22 LINE, PHONO, USB selector switch
- 23 CD, USB selector switch
- 24 FX 1 assign button
- 25 FX 2 assign button
- 26 Channel Level Indicator
- 27 TRIM control
- 28 ISO (HI, MID, LOW) controls
- 29 COLOR control
- 30 Headphones CUE button
- 31 Channel fader
- 32 Crossfader assign selector switch
- 33 Crossfader
- 34 FEELING ADJUST adjustment hole

## Mixer section

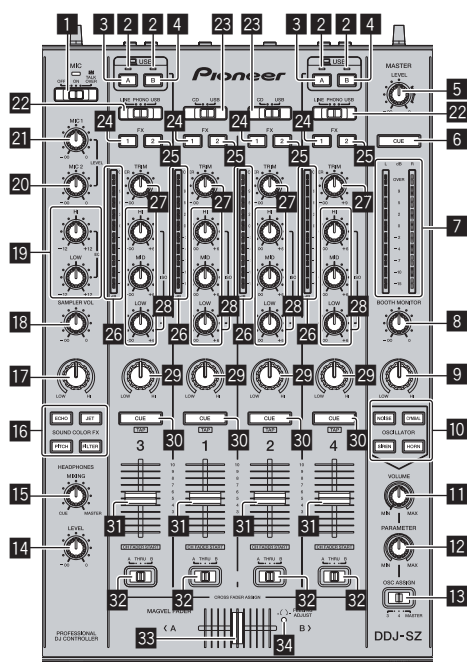


- 1 OFF, ON, TALK OVER selector switch
- 2 USB connection indicator
- 3 USB (A) button
- 4 USB (B) button
- 5 MASTER LEVEL control

---

## Effect section

This section is used to control the two effect units (FX1 and FX2). Controls and buttons to operate the FX1 unit are located on the left side of the controller, those to operate the FX2 unit are located on the right side of the controller. The channels to which the effect is to be applied are set using the effect assign buttons.



**1** Effect parameter controls


**2** FX BEATS control

**3** Effect parameter buttons

**4** TAP button

---

## Front panel

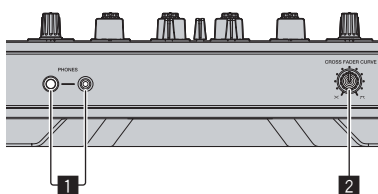


**1** PHONES jacks

**2** CROSS FADER CURVE selector switch


# Operation

## Connections

- 1 Connect headphones to one of the [PHONES] terminals.

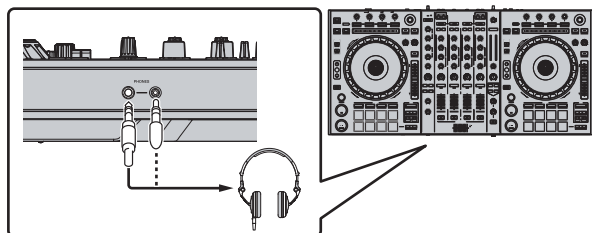


- 2 Connect powered speakers, a power amplifier, components, etc., to the [MASTER OUT 1] or [MASTER OUT 2] terminals.

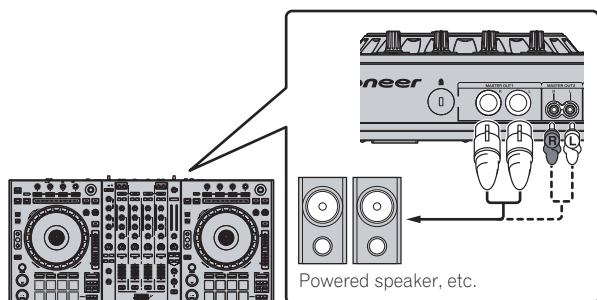

- To output the sound from the [BOOTH] terminals, connect speakers or other devices to the [BOOTH] terminals.
- For details on connecting the input/output terminals, see the Operating Instructions.

- 3 Connect this unit to your computer via a USB cable.

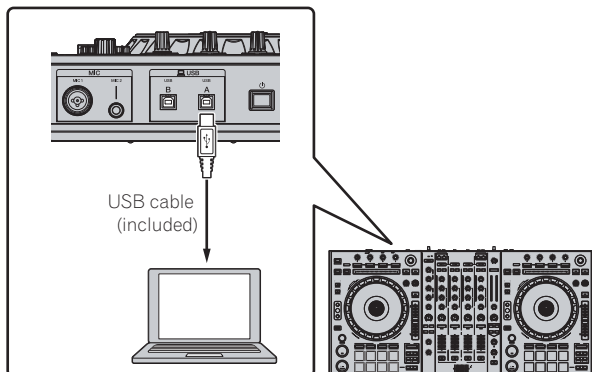


This product satisfies electromagnetic noise regulations when it is connected to other equipment through shielded cables and connectors. Use only the furnished accessory connecting cables.


D44-8-2\_A1\_En

- 4 Turn on the computer's power.

- 5 Connect the power cord.

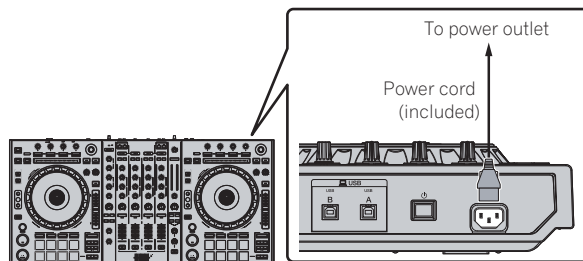

- 6 Press the [⏻] switch on this unit's rear panel to turn this unit's power on.

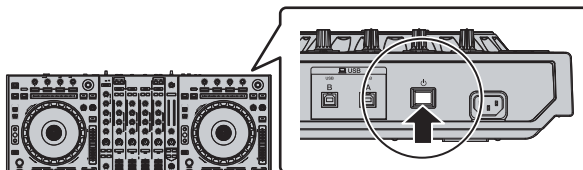

Turn on the power of this unit.

- For Windows users  
The message [Installing device driver software] may appear when this unit is first connected to the computer or when it is connected to a different USB port on the computer. Wait a while until the message [Your devices are ready for use] appears.

- 7 Turn on the power of the devices connected to the output terminals (powered speakers, power amplifier, components, etc.).

- When a microphone, DJ player or other external device is connected to input terminals, the power of that device also turns on.

# Starting the system

## Launching Serato DJ


### For Windows

From the Windows [Start] menu, click the [Serato DJ] icon under [All Programs] > [Serato] > [Serato DJ].

### For Mac OS X

In Finder, open the [Application] folder, then click the [Serato DJ] icon.

### Computer screen directly after the Serato DJ software is launched

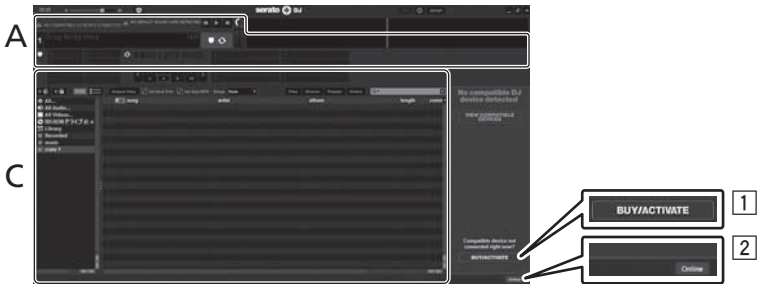

- 1 The [BUY/ACTIVATE] icon may appear on the right side of the screen that is displayed when Serato DJ is launched the first time, but there is no need to activate or purchase a license for those using DDJ-SZ.
- 2 Click [Online] to use the unit as is.

### To operate the beat grid


With Serato DJ, [SYNC PREFERENCES] is set to [Simple Sync] by default, but this must be switched to [Smart Sync] in order to perform beat grid operations.

### SETUP—DJ Preference—SYNC PREFERENCES

For instructions on displaying the settings screen and details on the beat grid, see the Serato DJ manual.

### Computer screen when a track is loaded in the Serato DJ software

Click [Library] at the upper left of the computer screen, then select [Vertical] or [Horizontal] from the pull-down menu to switch the Serato DJ screen.

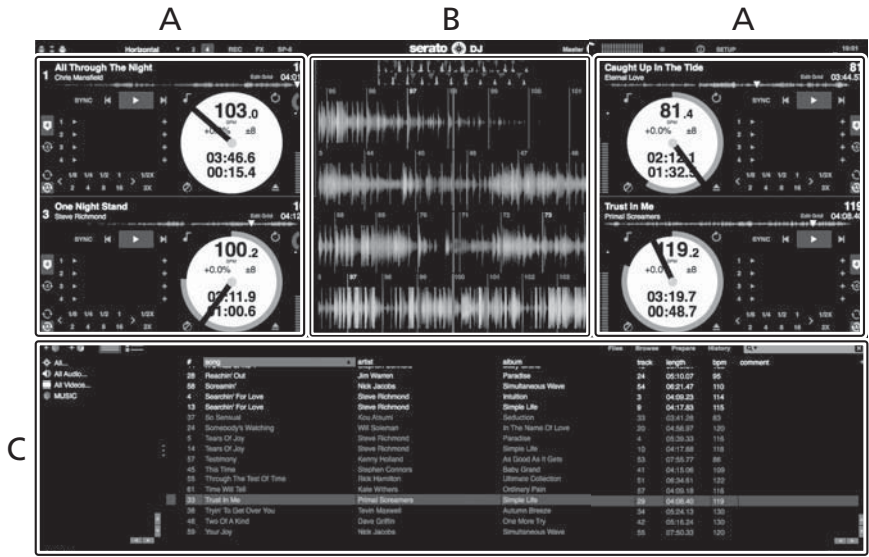

### A Deck section

The track information (the name of the loaded track, artist name, BPM, etc.), the overall waveform and other information is displayed here.

### B Waveform display

The loaded track's waveform is displayed here.

### C Browser section

Crates in which tracks in the library or sets of multiple tracks are stored are displayed here.

This manual consists mainly of explanations of functions of this unit as hardware. For detailed instructions on operating the Serato DJ software, see the Serato DJ software manual.

## Importing tracks

The following describes the typical procedure for importing tracks.

- There are various ways to import tracks with the Serato DJ software. For details, see the Serato DJ software manual.
- If you are already using Serato DJ software (Scratch Live, ITCH or Serato DJ Intro) and have already created track libraries, the track libraries you have previously created can be used as such.
- If you are using Serato DJ Intro and have already created track libraries, you may have to reanalyze the tracks.


### 1 Click the [Files] key on the Serato DJ software screen to open the [Files] panel.

The contents of your computer or the peripheral connected to the computer are displayed in the [Files] panel.

### 2 Click the folder on the [Files] panel containing the tracks you want to add to the library to select it.

### 3 On the Serato DJ software screen, drag and drop the selected folder to the crates panel.


A crate is created and the tracks are added to the library.

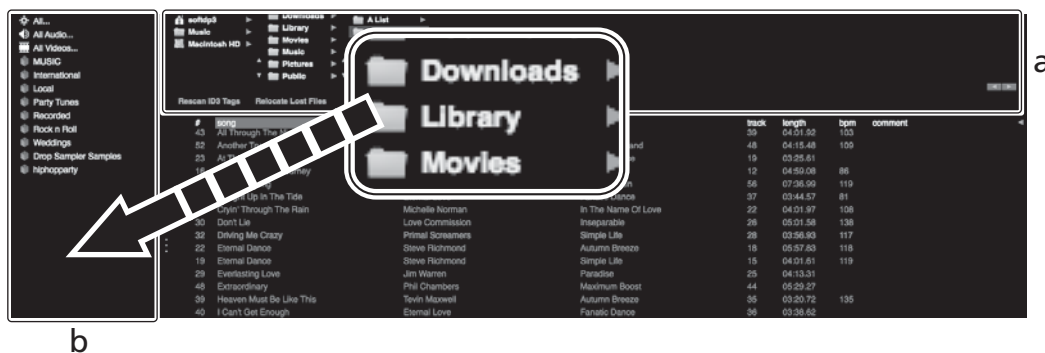

- a [Files] panel  
b Crates panel

## Loading tracks and playing them

The following describes the procedure for loading tracks into deck [1] as an example.

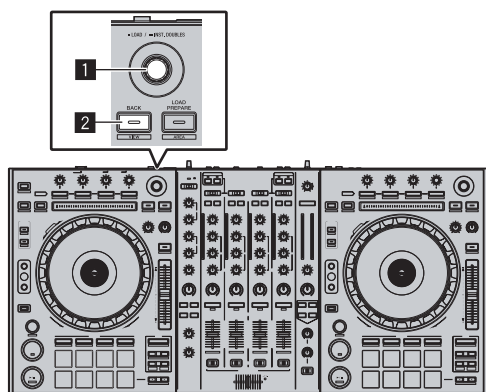

- 1 Rotary selector  
2 BACK (VIEW) button

### 1 Press this unit's [BACK (VIEW)] button, move the cursor to the crates panel on the computer's screen, then turn the rotary selector to select the crate, etc.

### 2 Press the rotary selector, move the cursor to the library on the computer's screen, then turn the rotary selector and select the track.



- a Library  
b Crates panel


### 3 Press the [DECK1] button.

### 4 Press the rotary selector to load the selected track onto the deck.

# Playing tracks and outputting the sound

The following describes the procedure for outputting the channel 1 sound as an example.

- Set the volume of the devices (power amplifier, powered speakers, etc.) connected to the [MASTER OUT 1] and [MASTER OUT 2] terminals to an appropriate level. Note that loud sound will be output if the volume is set too high.

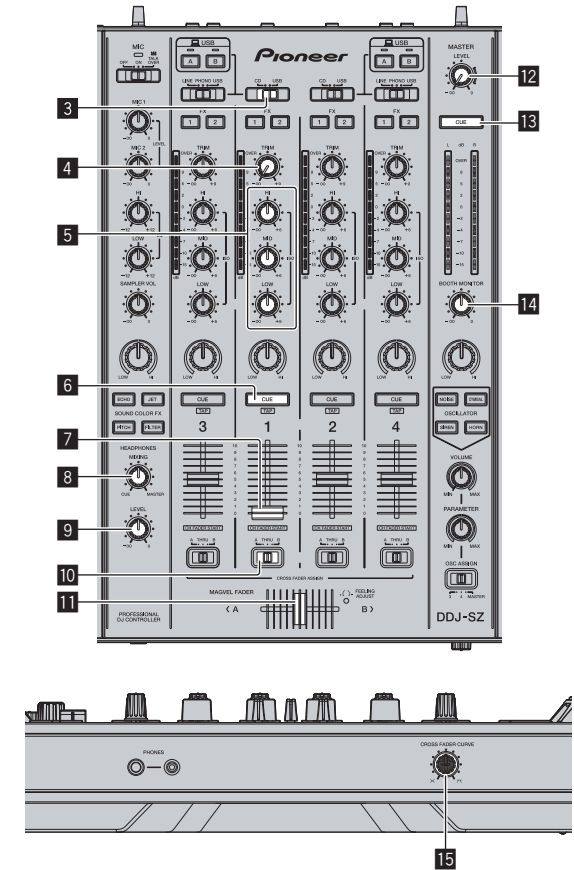


- 3 CD, USB selector switch
- 4 TRIM control
- 5 ISO (HI, MID, LOW) controls
- 6 Headphones CUE button
- 7 Channel fader
- 8 HEADPHONES MIXING control
- 9 HEADPHONES LEVEL control
- 10 Crossfader assign selector switch
- 11 Crossfader
- 12 MASTER LEVEL control
- 13 MASTER CUE button
- 14 BOOTH MONITOR control
- 15 CROSS FADER CURVE selector switch

## 1 Set the positions of the controls, etc., as shown below.

Names of controls, etc.	Position
MASTER LEVEL control	Turned fully counterclockwise
CD, USB selector switch	[USB] position
TRIM control	Turned fully counterclockwise
ISO (HI, MID, LOW) controls	Center
Channel fader	Moved forward
Crossfader assign selector switch	[THRU] position

## 2 Press the [►/II] button to play the track.

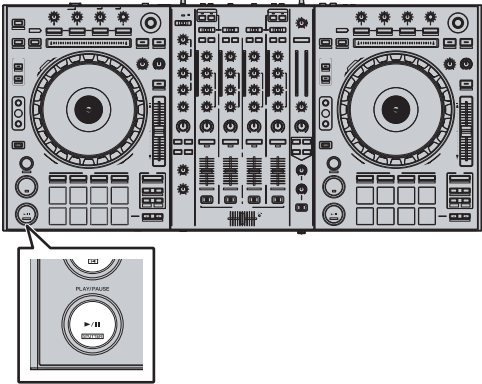

## 3 Turn the [TRIM] control.

Adjust the [TRIM] control so that the channel level indicator's orange indicator lights at peak level.

## 4 Move the channel fader away from you.

## 5 Turn the [MASTER LEVEL] control to adjust the audio level of the speakers.

Adjust the sound level output from the [MASTER OUT 1] and [MASTER OUT 2] terminals to an appropriate level.

# Monitoring sound with headphones

Set the positions of the controls, etc., as shown below.

Names of controls, etc.	Position
HEADPHONES MIXING control	Center
HEADPHONES LEVEL control	Turned fully counterclockwise

## 1 Press the headphones [CUE] button for the channel 1.

## 2 Turn the [HEADPHONES LEVEL] control.

Adjust the sound level output from the headphones to an appropriate level.



### Note

This unit and the Serato DJ software include a variety of functions enabling individualistic DJ performances. For details on the respective functions, see the Serato DJ software manual.

- The Serato DJ software manual can be downloaded from "Serato.com". For details, see *Downloading the Serato DJ software manual* (p. 5).

# Quitting the system

## 1 Quit [Serato DJ].

When the software is closed, a message for confirming that you want to close it appears on the computer's screen. Click [Yes] to close.

## 2 Press the [⏻] switch on this unit's rear panel to set this unit's power to standby.

## 3 Disconnect the USB cable from your computer.

# Additional information

## Changing the settings

- For detailed instructions on changing this unit's settings, see *Changing the settings* in the Operating Instructions.

## Troubleshooting

- Incorrect operation is often mistaken for trouble or malfunction. If you think that there is something wrong with this component, check the items in the "Troubleshooting" section of this unit's operating instructions and the **[FAQ]** for the **[DDJ-SZ]** on the Pioneer DJ support site.  
Sometimes the problem may lie in another component. Inspect the other components and electrical appliances being used. If the problem cannot be rectified, ask your nearest Pioneer authorized service center or your dealer to carry out repair work.
- This unit may not operate properly due to static electricity or other external influences. In this case, proper operation may be restored by turning the power off, waiting 1 minute, then turning the power back on.

## About trademarks and registered trademarks

- Pioneer is a registered trademark of PIONEER CORPORATION. The names of companies and products mentioned herein are the trademarks of their respective owners.

## Cautions on copyrights

Recordings you have made are for your personal enjoyment and according to copyright laws may not be used without the consent of the copyright holder.

- Music recorded from CDs, etc., is protected by the copyright laws of individual countries and by international treaties. It is the full responsibility of the person who has recorded the music to ensure that it is used legally.
- When handling music downloaded from the Internet, etc., it is the full responsibility of the person who has downloaded the music to ensure that it is used in accordance with the contract concluded with the download site.

## Specifications

Power requirements .....	AC 110 V to 240 V, 50 Hz/60 Hz
Power consumption.....	30 W
Power consumption (standby).....	0.4 W
Main unit weight .....	10.4 kg
Max. external dimensions ....	870 mm (W) × 98.4 mm (H) × 419.5 mm (D)
Tolerable operating temperature .....	+5 °C to +35 °C
Tolerable operating humidity .....	5 % to 85 % (no condensation)

## Audio Section

Sampling rate.....	44.1 kHz
A/D, D/A converter.....	24 bits
Frequency characteristic	
USB, CD/LINE, MIC1, MIC2.....	20 Hz to 20 kHz
S/N ratio (rated output, A-WEIGHTED)	
USB.....	111 dB
CD/LINE.....	97 dB
PHONO.....	90 dB
MIC1 .....	84 dB
MIC2 .....	84 dB
Total harmonic distortion (20 Hz — 20 kHzBW)	
USB.....	0.002 %
CD/LINE.....	0.004 %
Standard input level / Input impedance	
CD/LINE.....	−12 dBu/47 kΩ
PHONO.....	−52 dBu/47 kΩ
MIC1 .....	−52 dBu/8.5 kΩ
MIC2 .....	−52 dBu/8.5 kΩ
Standard output level / Load impedance / Output impedance	
<b>MASTER OUT 1</b> .....	+6 dBu/10 kΩ/390 Ω or less
<b>MASTER OUT 2</b> .....	+2 dBu/10 kΩ/820 Ω or less
BOOTH .....	+6 dBu/10 kΩ/390 Ω or less
PHONES.....	+8 dBu/32 Ω/10 Ω or less
Rated output level / Load impedance	
<b>MASTER OUT 1</b> .....	24 dBu/10 kΩ
<b>MASTER OUT 2</b> .....	20 dBu/10 kΩ
Crosstalk	
CD/LINE.....	82 dB
Channel equalizer characteristic	
HI .....	−∞ dB to +6 dB (13 kHz)
MID .....	−∞ dB to +6 dB (1 kHz)
LOW .....	−∞ dB to +6 dB (70 Hz)
Microphone equalizer characteristic	
HI .....	−12 dB to +12 dB (10 kHz)
LOW .....	−12 dB to +12 dB (100 Hz)

## Input / Output terminals

<b>CD/LINE</b> Input terminals	
RCA pin jacks.....	4 sets
<b>PHONO/LINE</b> input terminals	
RCA pin jacks.....	2 sets
<b>MIC1</b> terminal	
XLR connector/phone jack (Ø 6.3 mm) .....	1 set
<b>MIC2</b> terminal	
Phone jack (Ø 6.3 mm) .....	1 set
<b>MASTER OUT 1</b> output terminal	
XLR connector.....	1 set
<b>MASTER OUT 2</b> output terminal	
RCA pin jacks.....	1 set
<b>BOOTH</b> output terminal	
Phone jack (Ø 6.3 mm) .....	1 set
<b>PHONES</b> output terminal	
Stereo phone jack (Ø 6.3 mm) .....	1 set
Stereo mini phone jack (Ø 3.5 mm) .....	1 set
<b>USB</b> terminals	
B type.....	2 sets

- Be sure to use the **[MASTER OUT 1]** terminals only for a balanced output. Connection with an unbalanced input (such as RCA) using an XLR to RCA converter cable (or converter adapter), etc., may lower the sound quality and/or result in noise.  
For connection with an unbalanced input (such as RCA), use the **[MASTER OUT 2]** terminals.
- The specifications and design of this product are subject to change without notice.
- © 2013 PIONEER CORPORATION. All rights reserved.



© 2013 PIONEER CORPORATION.

All rights reserved.

© 2013 PIONEER CORPORATION.

Tous droits de reproduction

et de traduction réservés.

---

## PIONEER CORPORATION

1-1, Shin-ogura, Saiwai-ku, Kawasaki-shi, Kanagawa 212-0031, Japan

## Корпорация Пайонир

1-1, Син-Огура, Сайвай-ку, г. Кавасаки, префектура Канагава, 212-0031, Япония

## Импортер: ООО "ПИОНЕР РУС"

125040, Россия, г. Москва, ул. Правды, д.26 Тел.: +7(495) 956-89-01

## PIONEER EUROPE NV

Haven 1087, Keetberglaan 1, B-9120 Melsele, Belgium TEL: 03/570.05.11

## PIONEER ELECTRONICS (USA) INC.

P.O. BOX 1720, Long Beach, California 90801-1720, U.S.A. TEL: (800) 421-1404

## PIONEER ELECTRONICS ASIACENTRE PTE. LTD.

253 Alexandra Road, #04-01, Singapore 159936 TEL: 65-6472-7555

## PIONEER ELECTRONICS AUSTRALIA PTY. LTD.

5 Arco Lane, Heatherton, Victoria, 3202, Australia, TEL: (03) 9586-6300

## PIONEER ELECTRONICS (THAILAND) CO., LTD.

17th Fl., KPN Tower, 719 Rama 9 Road, Bangkapi, Huaykwang, Bangkok 10310 TEL: 66-2-717-0777

## PIONEER TECHNOLOGY (MALAYSIA) SDN. BHD

16th Floor, Menara Uni. Asia 1008 Jalan Sultan Ismail 50250 Kuala Lumpur TEL: 60-3-2697-2920

## 先鋒股份有限公司

台灣台北市內湖區瑞光 407 號 8 樓 TEL: 886-(0)2-2657-3588

## 先鋒電子（香港）有限公司

香港九龍長沙灣道 909 號 5 樓 TEL: 852-2848-6488

## PIONEER GULF FZE

Lob 11-017, Jebel Ali Free Zone P.O. Box 61226, Jebel Ali Dubai TEL: 971-4-8815756

## PIONEER ELECTRONICS DE MEXICO S.A. DE C.V.

Blvd.Manuel Avila Camacho 138 10 piso Col.Lomas de Chapultepec, Mexico, D.F. 11000 TEL: 55-9178-4270

## PIONEER INTERNATIONAL LATIN AMERICA S.A.

Plaza Credicorp Bank, 14th Floor, Calle 50, No.120 Panama City 0816-01361 Republic of Panama TEL: 507-300-3900

Сделано в Малайзии

Printed in / Imprimé

<DRH1249-B>

